



LC



Intertek

EP 5016978

Energy Performance
Verified / Rendement
Énergétique Vérifié



Intertek

4004503

Conforms to NSF/ANSI STD 7
and UL STD 471

Certified to CSA STD C22.2 No. 120
Meets NSF 7 requirements for open food
as a storage refrigerator



Intertek

Project: _____	AIA# _____
Item #: _____ Qty: _____	SIS# _____
Model #: _____	

Lettuce Crisper

LC

Standard Features

- Self-contained forced air refrigeration system for uniform cooling of product
- Automatic condensate evaporator
- Digital T-STAT control with automatic defrost
- All stainless steel interior construction
- Stainless steel foamed-in-place insulated door and lettuce chute
- Chute with flip-up door for easy access to lettuce
- Stainless steel exterior construction with galvanized steel back and bottom
- Removable plastic lettuce bin and stainless steel divider (additional bins and dividers available)
- Eco friendly foamed-in-place insulation has zero impact on global warming or ozone depletion
- Removable condenser air inlet filter for easy cleaning
- Bracket for wall mounting
- 4" adjustable legs available
- Nine-foot grounded cord and plug provided

Specifications

Electrical

- 120V, 1 phase, 60 Hz, 2.5 full load amps
- Separate 15 amp circuit is required
- Includes a 9-foot NEMA 5-15P grounded cord
- Available with 220V, 1 phase, 50Hz electrical



5-15P

Refrigeration

- 1/8 HP, R290 refrigerant, 4.25 oz
- 850 BTUH refrigeration capacity (0.07 tons)
- 1,023 BTU/hr heat rejection

Plumbing

- Automatic condensate evaporator. No drain connection required.

Lettuce Bin

- Removable plastic bin and stainless steel divider included

Operating Range

- 34°F (1°C) to 40°F (4°C)

Hinge Location

- Standard hinge location is right. Factory set left door hinge is optional. Door is field reversible.

Legs (Optional)

- 4" stainless steel adjustable legs

Materials

- Stainless steel parts include: interior, door, lettuce chute, flip-up lid, and exterior front, sides and top
- Galvanized steel parts include: back, condensing unit and exterior bottom
- Roto-molded plastic parts include: lettuce bin

Capacity

- Approximately 50 heads of lettuce (shredded)


Glastender, Inc. • 5400 N Michigan Rd • Saginaw, MI • 48604-9780
989.752.4275 • 800.748.0423 • Fax 989.752.4444
www.glastender.com

Approval/Notes:


Specifications subject to change without notice. For current specifications please visit our website.

Lettuce Crisper




Dimensional Information

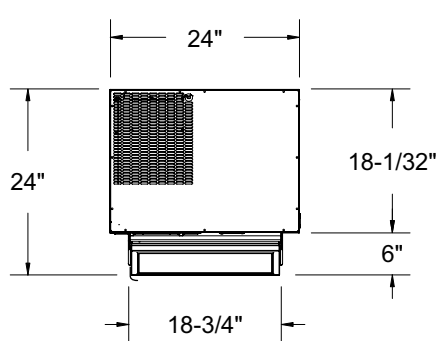

FRONT


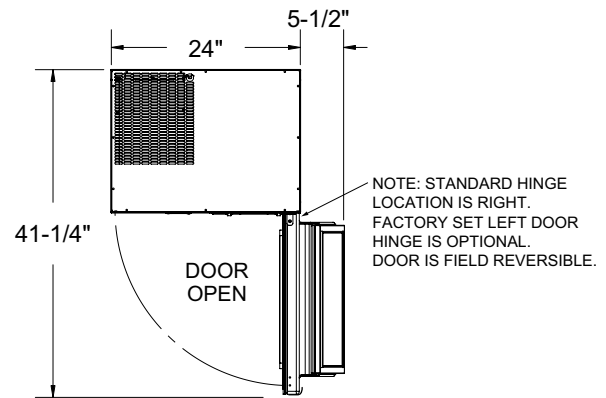


PLAN VIEWS

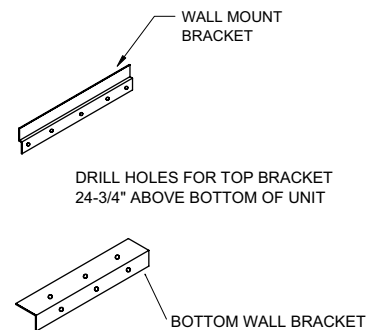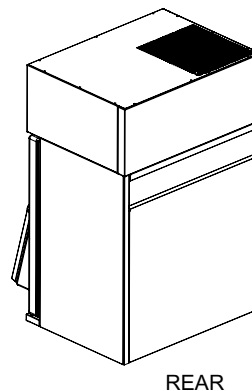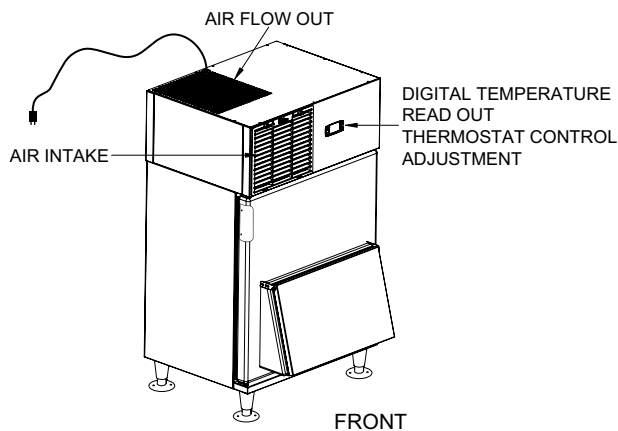

8" OF AIR SPACE IS REQUIRED ABOVE LETTUCE CRISPER TO ALLOW FOR AIR FLOW OUT
WARNING: COMPRESSOR FAILURE DUE TO RESTRICTION OR BLOCKAGE OF AIR FLOW WILL VOID WARRANTY.

ISOMETRIC VIEWS

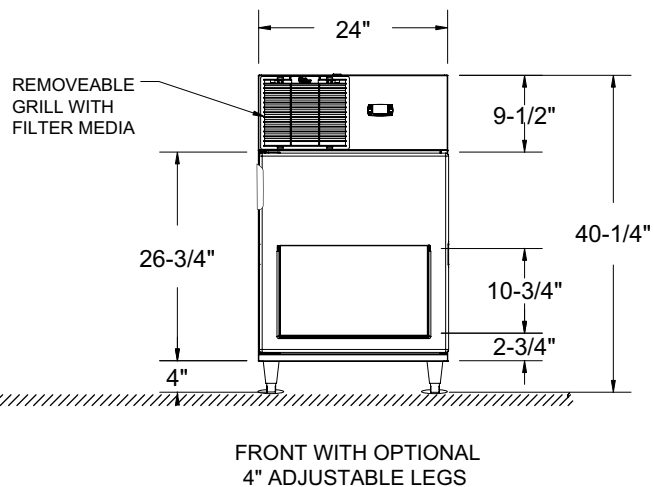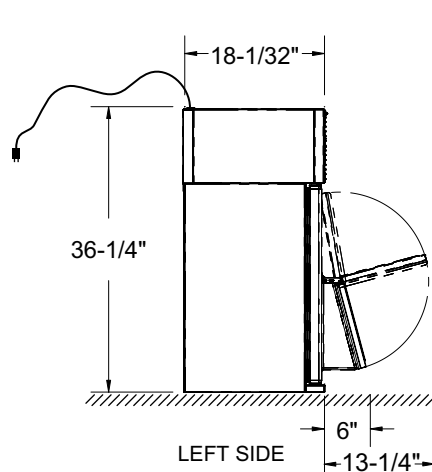

ELEVATION VIEWS