

Project: _____	AIA# _____
Item #: _____ Qty: _____	SIS# _____
Model #: _____	

## Pipe Cantilever Tower



PC-8-SS

NOTE: Faucet handles not included.

PC- - -

**Size:** Specify the number of faucets from 4, 6 or 8

**Finish:**  
 SS = Grainline  
 MF = Mirror finish

### Standard Features

- 1/4" shanks with 3/16" restriction lines
- Includes all stainless steel faucets
- Surface mount, stainless steel drain pan with removable, perforated insert
- Tower mounting hardware for tops up to 4" thick

### Configurable Options

- 4, 6 or 8 faucets
- Right or left orientation
- Grainline or mirror finish
- Air cooled for direct-draw system or glycol cooled for recirculating system
- Rinser faucet

### Specifications

#### Materials

- Tower shell is 304 stainless steel; 0.065" wall thickness, 4" diameter
- Flange is 1/4", 304 stainless steel
- 20 gauge stainless steel drain pan and perforated inserts

#### Shank Sizes

- 1/4" I.D. with 3/16" fitting

#### Drains

- 1/2" tailpiece on drain pan

#### Rinser Faucet (optional)

- Accepts 3/8" cold water lead
- 30 psi water pressure regulator included
- 1.2 gallons per minute

### Optional Rinser Faucet

#### Installation Notes

- Unit does not provide a 1" air gap
- Must be installed with external backflow prevention to meet applicable federal, state, and local plumbing code requirements.
- Install in-line water pressure regulator (included)
- A separate shut-off valve is recommended (not included)

**NOTE: Rinser faucets are not intended for use with towers mounted to a refrigerator due to risk of water line freeze up.**



Optional Rinser Faucet Extension

03012383  
 Rinser Faucet Assembly



**Intertek**  
 4004503  
 Conforms to NSF/ANSI STD 372

Underbar installation instructions: <https://www.glastender.com/support/documents/manuals/underbar-installation-instructions>


Cleaning & care instructions: <https://www.glastender.com/support/documents/manuals/general-cleaning-and-care-instructions-for-stainless-steel>

<b>Glastender, Inc.</b> • 5400 N Michigan Rd • Saginaw, MI • 48604-9780 989.752.4275 • 800.748.0423 • Fax 989.752.4444 <a href="http://www.glastender.com">www.glastender.com</a>	Approval/Notes:
<small>Specifications subject to change without notice. For current specifications please visit our website.</small>	


# Pipe Cantilever Towers

## Drawings

### SIDE ELEVATIONS







LEFT ORIENTATION




RIGHT ORIENTATION

### PLAN VIEWS


#### NO RINSER FAUCET

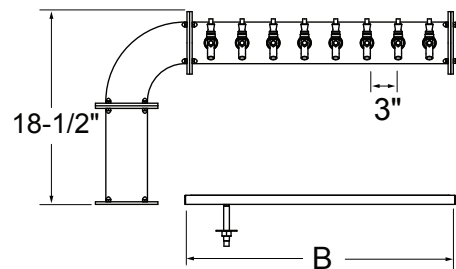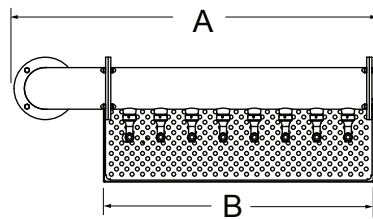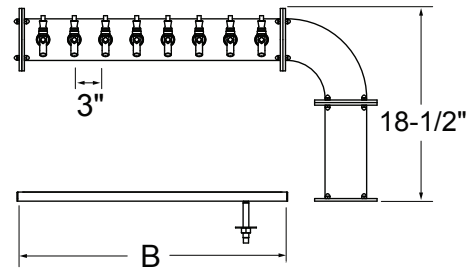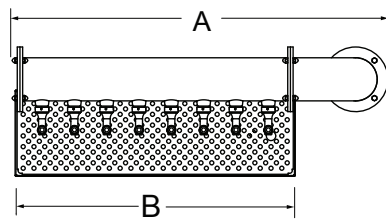





#### WITH RINSER FAUCET



LEFT ORIENTATION



RIGHT ORIENTATION

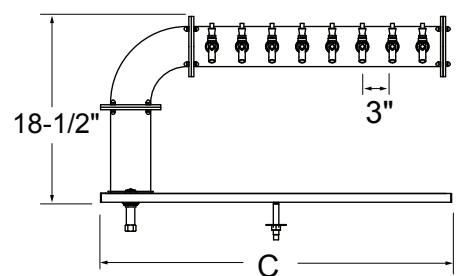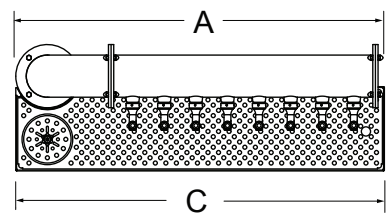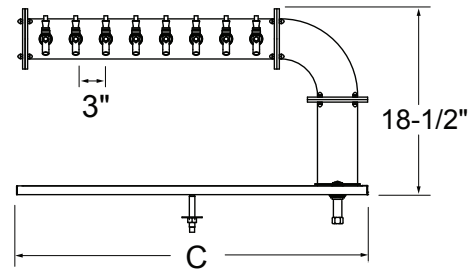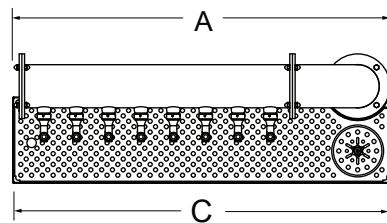

#### PIPE CANTILEVER TOWER

FAUCETS	4	6	8
"A" WIDTH	23"	29"	35"
"B" WIDTH	14"	20"	26"
"C" WIDTH	23"	29"	35"